walther CEEtyp

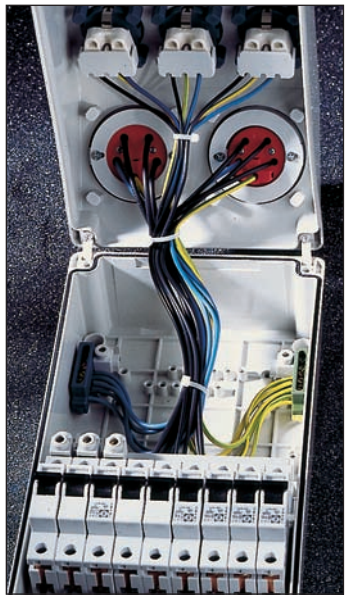

Combination Outlets Save 50 — 75% in Time and Material Costs

Walther Electric introduces a custom-built power distribution system, made up of multiple variations of receptacles, that we call "Combination Outlets".

Combination outlets combine multiple receptacles or an assortment of receptacles into one compact enclosure. By combining numerous receptacles within one electrical enclosure, multiple conduit runs with individual branch circuit wiring can be eliminated; as a result, significantly reducing material costs. These combination outlets are supplied complete with all internal wiring and in most cases only require one connection to the incoming electrical supply conduit.

The Walther combination outlet system utilizes standard NEMA wiring devices, IEC309 pin and sleeve connectors, or practically any type of connection that meets your specific requirements (European "Schuko", French, United Kingdom, Australian, Italian, Swiss, Israeli, Danish, Japanese, etc.).

Because of the compact size of these combinations, installation of multiple receptacles in tight or limited space is normally not a problem. In fact, many of the enclosures are designed to fit within the web of an 8" column allowing the use of columns as a mounting location.

Best of all, overload protection is typically provided with built-in circuit breakers within the enclosure, which are easily accessible by opening the see-through cover. This cover can be secured by a choice of methods ranging from a simple thumbscrew to lockout protection for greater safety and compliance with OSHA Lockout/Tagout regulations. The Walther combination outlet system also utilizes fuses, RCD's, GFCI breakers or practically any type of overload protection that meets your specific requirements.

The high impact thermoplastic and solid rubber enclosures, while abuse and corrosion resistant, are also non conductive, which enhances the safety of the product (consult technical service for stainless steel enclosures).

Each combination is checked in accordance with EN 60 439-1; 1994 table 7 and test certificates are provided with each unit. This test data is saved and can be retrieved at any time.

Walther Electric welcomes the opportunity to manufacture custom combinations of receptacles and inlets built to your specific needs and requirements. The examples shown in this section represent only a small fraction of the possible combinations available. Our application engineers are at your service to help plan and construct combination units according to your specific requirements. Simply call 1-800-WALTHER.

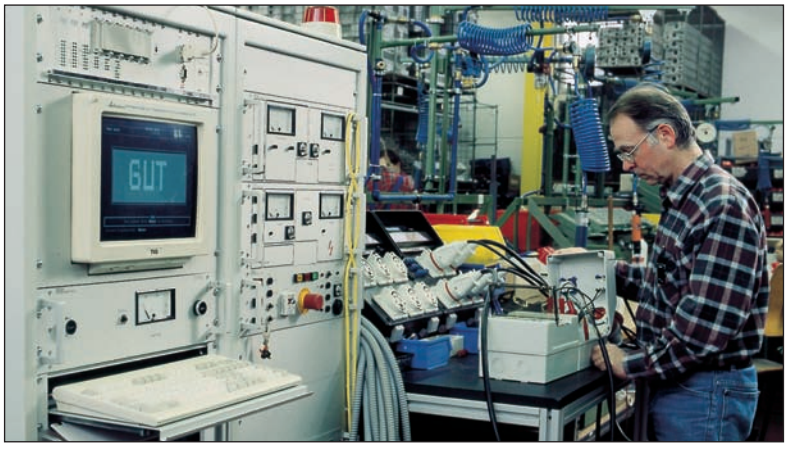

COMBINATION OUTLETS

PEDESTALS AND FRAMES

HANGING COMBINATIONS

Walther Electric welcomes the opportunity to manufacture custom combinations of receptacles and inlets built to your specific needs and requirements. The examples shown in this section represent only a small fraction of the possible combinations available. Our application engineers are at your service to help plan and construct combination units according to your specific requirements. Simply call 1-800-WALTHER.

Part No: 64929DD

Enclosure: Solid Rubber P/N 6499901, UL Type 3R

Input: 50 Amp, 120/240V Inlet

Output: Three (3) 20 Amp, GFCI Duplex Receptacles, 125V, NEMA 5-20R with cover
One (1) 50 Amp Receptacle 125/250V with cover

Overload Protection: Three (3) 20 Amp, UL Type C, 1-Pole Circuit Breakers
One (1) 50 Amp, UL Type C, 2-Pole Circuit Breakers

Dimensions: Including Handle 10.6" x 10.8" x 12.2" H (270mm x 275mm x 310mm H)

Weight: 18 lbs.
Application: Shipyards, Industrial, Construction, Etc.

Part No: 64829AR

Enclosure: Solid Rubber P/N 6489901, UL Type 1
(With 4 External Mounting Brackets & Handle)

Input: 50 Amp, 120/240V Inlet

Output: Six (6) 20 Amp, GFCI Duplex Receptacles, 125V, NEMA 5-20R with cover
One (1) 50 Amp Receptacle 125/250V with cover

Overload Protection: Two (2) 20 Amp, UL Type C, 1-Pole Circuit Breakers

Dimensions: Not Including Handle 16.5" x 13.6" x 8.4" D (420mm x 345mm x 213mm D)

Weight: 33 lbs.
Application: Shipyards

NEW!

Plug (Input)	(Output) No.	(Output) Receptacles	Overload Protection
NEMA L21-30P 30A 3ØY120/208 VAC	3	NEMA 5-20R 20A 125VAC	3 MCB's 1 Pole 20A>>C<<

Plug (Input)	(Output) No.	(Output) Receptacles	Overload Protection
Customer Supplied Cable	2	NEMA 5-20R 20A 125VAC-Quad Plex	2 MCB's 1 Pole 20A>>C<<

Plug (Input)	(Output) No.	(Output) Receptacles	Overload Protection
IEC309-1 and 309-2 5 Wire, 32 Amp	3	IEC309-1 and 309-2 5 Wire, 32 Amp	1 MCB's 3 Pole 32A>>C<<
	1	IEC309-1 and 309-2 5 Wire, 16 Amp	1 MCB's 3 Pole 16A>>C<<
	3	Schuko Socket Outlets	3 MCB's 1 Pole 16A>>B<<

Plug (Input)	(Output) No.	(Output) Receptacles	Overload Protection
IEC309-1 and 309-2 5 Wire, 63 Amp	2	IEC309-1 and 309-2 5 Wire, 32 Amp	2 MCB's 3 Pole 32A>>C<<
	2	IEC309-1 and 309-2 5 Wire, 16 Amp	2 MCB's 3 Pole 16A>>C<<
	8	Schuko Socket Outlets	4 MCB's 1 Pole 16A>>B<<

Plug (Input)	(Output) No.	(Output) Receptacles	Overload Protection
Stage Pin 60 AMP	3	NEMA 5-20R 20A 125VAC	3 MCB's 1 Pole 20A>>C<<

Plug (Input)	(Output) No.	(Output) Receptacles	Overload Protection
IEC309-1 and 309-2 60A 3ØY120/208 VAC	9	NEMA 5-20R 20A 125VAC	9 MCB's 1 Pole 20A>>C<<

Plug (Input)	(Output) No.	(Output) Receptacles	Overload Protection
Cam Connectors 400 Amp	15	NEMA 5-20R 20A 125VAC	15 MCB's 1 Pole 20A>>C<<

Walther Electric welcomes the opportunity to manufacture custom combinations of receptacles and inlets built to your specific needs and requirements. The examples shown in this section represent only a small fraction of the possible combinations available. Our application engineers are at your service to help plan and construct combination units according to your specific requirements. Simply call 1-800-WALTHER.

NEW!

Part No: 6WE2000
Enclosure: Solid Rubber, Type 6419901, UL Type 3R
Input: NEMA L21-30P with 2-meter supply cable
Output: Three (3), NEMA 5-20R, RED / BLACK / BLUE, each circuit with an indicator light
Power Feed-Through Cable: NEMA L21-30R with 2-meter supply cable
Overload Protection: Three (3), MCB, 20-Amp, 1-Phase
Dimensions: L17.56" x B4.53" x H4.34" (446mm x 115mm x 110mm)
Weight: 6 lbs.
Application: Entertainment: Convention Halls

Part No: 64829AW
Enclosure: Solid Rubber P/N 6489901, UL Type 1
Input: Hardwire With Main On/Off Switch
Output: Four (4) CEEtyp, Female Receptacles, 60/63-Amp, 5-Wire (3P+N+G), Walther no. 569509
One (1) 50 Amp Receptacle, 125/250V, CS6369 with cover
Overload Protection: Four (4) 63 Amp, UL Type C, 3-Pole Circuit Breakers
One (1) 50 Amp, UL Type C, 2-Pole Circuit Breaker
Dimensions: 31.1" x 13.6" x 4.5" (H=790mm x L=345mm x W=115mm)
Weight: 60 lbs.
Application: GENSET PDU

Part No: 64917AL
Enclosure: Solid Rubber P/N 6499901, UL Type 3R
Input: 60 Amp Male Plug, 3 Pole, 4 Wire Grounding, 3 Phase 480 VAC IEC309-1 and 309-2
6.5' (2 Meters) Supply Cable
Output: Three (3) Amp, Receptacles , 3 Pole, 4 Wire Grounding, 3 Phase 480 VAC, IEC309-1 and 309-2
Overload Protection: Three (3) 32 Amp, UL Type C, 3-Pole Circuit Breakers
Dimensions: 10.6" x 10.8" x 12.2" H Including Handle (270mm x 275mm x 310mm H)
Weight: 26 lbs.
Application: Shipyards

Part No: 64829AW
Enclosure: Solid Rubber Type 648 (x3), Wall Mount, UL Type 1
Input: Hardwire
Output: Three (3) Rows, CAM-LOK, E16, Female, (3P+G), with protective covers.
One (1) 50 Amp Receptacle, 125/250V, CS6369, with Weatherproof Plate.
Two (2), CEEtyp, 60-Amp, Female Receptacles, 5W (3P+N+G), 569509.
One (1), 50-Amp, 2P open terminal block for futrure expansion with breaker.
Overload Protection: Three (3) 40 Amp, UL Type C, 3-Pole Circuit Breakers (CAMs)
Two (2) 50 Amp, UL Type C, 2-Pole Circuit Breaker
Two (2) 60 Amp, UL Type C, 3-Pole Circuit Breaker (CEEtyp)
Dimensions: 14.6" x 40.7" x 4.5" (H=370mm x L=1035mm x W=115mm)
Weight: 60 lbs.
Application: GENSET PDU

Part No: 64829AY
Enclosure: Two (2) Solid Rubber P/N 6489901 UL Type 1
Input: CEEtyp, IEC309-1/-2, 100-Amp, Male Inlet, 3-PhaseY120/208V, 5-Wire, Walther no. 679521
With 100-Amp Main On/Off Switch
Output: Six (6) NEMA 5-20R, 20-Amp, Female Receptacles, 3-Wire (1P+N+G) with covers
Five (5) CAM-LOK Connectors , E16, (Black, Red, Blue, White, Green) with covers
One (1) NEMA 18-50R, 50-Amp, Female Receptacle, 4-Wire (3P+G) with cover
Overload Protection: Six (6) 20 Amp, UL Type C, 1-Pole Circuit Breakers
One (1) 50 Amp, UL Type C, 3-Pole Circuit Breaker
Dimensions: 17" x 14" x 14" (H x L x W)
Weight: 62 lbs.
Application: GENSET PDU

NEW!

OTHER INDUSTRIES AND APPLICATIONS

- Amusement Parks and Attractions
- Convention Centers, Trade Fairs and Exhibitions
- Fairgrounds, Flea Markets and Bazaars
- Indoor/Outdoor Concerts and Performances
- Military
- Temporary Lighting Systems
- Wherever portable and/or temporary power distribution is required

PORTABLE POWER

NEW!

Safety

Durability

Versatility

NEW!

CAMPGROUNDS
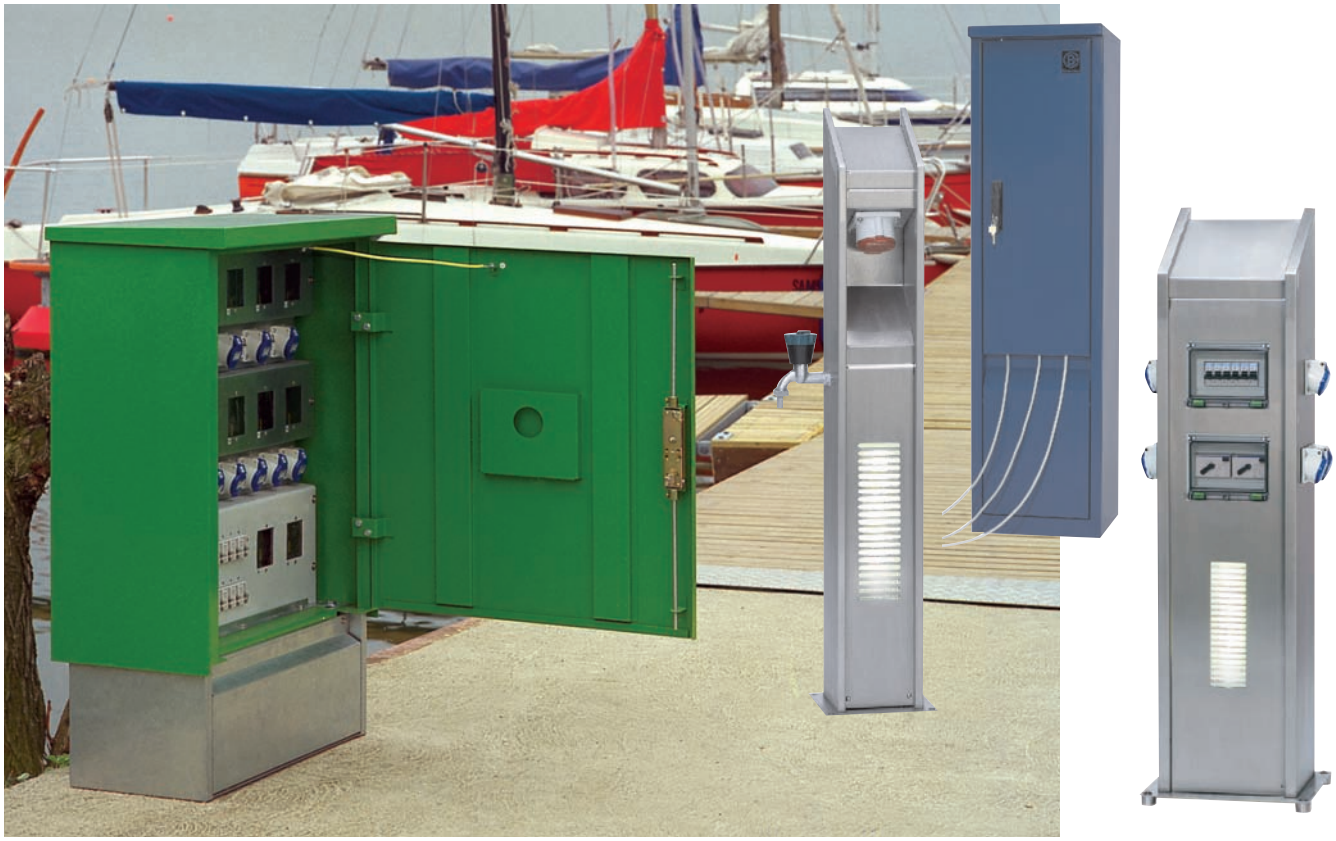
MARINAS