

PRODUCT DATA SHEET

Part Number 679318

EAN

Manufacturer Walther-Werke

WEEE-Reg-Nr

100A IEC 60309 Inlet, 1-PH, 3 WIRE


- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Retaining Device
- Gasket
- Zinc electroplated Steel Screws
- Color Coded by voltage
- Double terminal screws on all amperage devices
- Ground first to mate – last to break for added safety
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.



Ordering/Logistics Information

Order Unit	Piece
Net Weight	1.48 lbs or 0.673 kg
Packing Quantity (VPE)	2
Packaging Length	12.21 in or 0.31 m
Packaging Width	7.68 in or 0.195 m
Packaging Depth	5.52 in or 0.14 m
Gross Weight (VPE)	3.30 lbs or 1.494 kg

Certification


VDE/ENEC certification	134191
UL certification	E83342 
And multiple international certifications	

Classification system

Classification system	ETIM_6.0
ETIM Class	EC001319

Technical Product Data

IEC-amperage	125A
Amperage acc. UL/CSA	100A
Number of poles	2P + G
Voltage acc. EN 60309-2	250 V / (50-60HZ)
Clock hour position	6 h
Identification color	Blue
RAL-number	5002
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Maximum torque terminal screw	4 Nm
Angle of receptacle	Straight
Material	Plastic
Flange size vertical	5.11 in or 130 mm
Drill hole distance vertical	4.09 in or 104 mm
Flange size horizontal	5.11 in or 130 mm
Drill hole distance horizontal	4.09 in or 104 mm

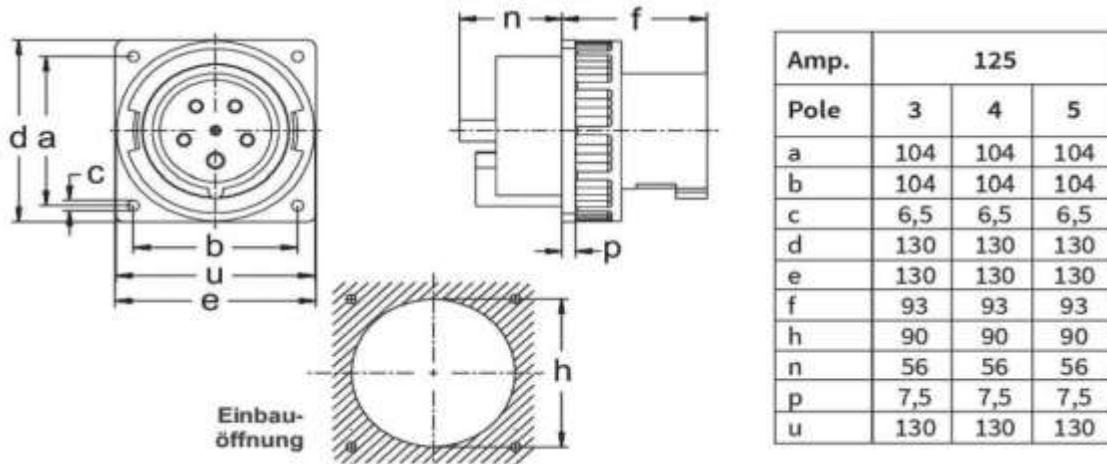

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.