

PRODUCT DATA SHEET

Part Number 679421

EAN

Manufacturer Walther-Werke

WEEE-Reg-Nr

100A 4P 230V 9H IP67 IEC Inlet

- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Retaining Device
- Gasket
- Zinc electroplated Steel Screws
- Color Coded by voltage
- Double terminal screws on all amperage devices
- Ground first to mate – last to break for added safety
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.



Ordering/Logistics Information

| | |
|------------------------|----------------------|
| Order Unit | Piece |
| Net Weight | 2.01 lbs or 0.91 kg |
| Packing Quantity (VPE) | 2 |
| Packaging Length | 12.21 in or 0.31 m |
| Packaging Width | 7.68 in or 0.195 m |
| Packaging Depth | 5.52 in or 0.14 m |
| Gross Weight (VPE) | 4.34 lbs or 1.968 kg |

Certification

VDE/ENEC certification 134191

UL certification E83342




And multiple international certifications

Classification system

| | |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class | EC001319 |

Technical Product Data

| | |
|--------------------------------|-------------------|
| IEC-amperage | 125A |
| Amperage acc. UL/CSA | 100A |
| Number of poles | 3P + G |
| Voltage acc. EN 60309-2 | 250 V / (50-60HZ) |
| Clock hour position | 9 h |
| Identification color | Blue |
| RAL-number | 5002 |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Maximum torque terminal screw | 4 Nm |
| Angle of receptacle | Straight |
| Material | Plastic |
| Flange size vertical | 5.11 in or 130 mm |
| Drill hole distance vertical | 4.09 in or 104 mm |
| Flange size horizontal | 5.11 in or 130 mm |
| Drill hole distance horizontal | 4.09 in or 104 mm |

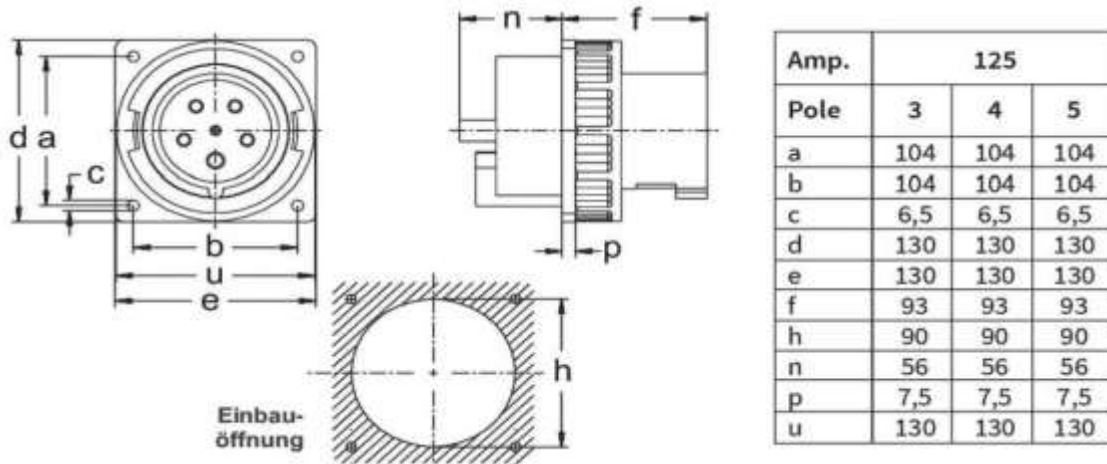

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.