

## PRODUCT DATA SHEET

Part Number	111306
EAN	4015609009312
Manufacturer	Walther-Werke
WEEE-Reg-Nr	DE 22131895




### 16A 3P 230V 6H IP44 IEC Wall mount Receptacle

- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Two knock-out cable entries both on top and bottom and one Knock-out floor entry
- Zinc electroplated Steel Screws
- Screwed terminal connection system
- Color Coded
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.

### Ordering/Logistics Information

Order Unit	Piece
Net Weight	0.79 lbs or 0.36 kg
Packing Quantity (VPE)	5
Packaging Length	12.21 in or 0.31 m
Packaging Width	10.04 in or 0.255 m
Packaging Depth	5.91 in or 0.15 m
Gross Weight (VPE)	4.06 lbs or 1.84 kg

### Certification


VDE/ENEC certification	123017
UL certification	E83342 
EAC certification	BY112.02.01.020 060089
And multiple international certifications	

## Classification system

Classification system	ETIM_6.0
ETIM Class	EC001321

## Technical Product Data

Model	Surface mounted (plaster)
IEC Amperage	16A
Amperage acc. UL/CSA	20A
Number of poles and wires	3= 2P + G
Voltage acc. EN 60309-2	230 V / (50-60HZ) red
Clock hour position	6 h
Identification color	Blue
RAL-number	5002
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Maximum torque terminal screw	0.8 NM
Material	Plastic
Type of fastening	Inner lying mounting

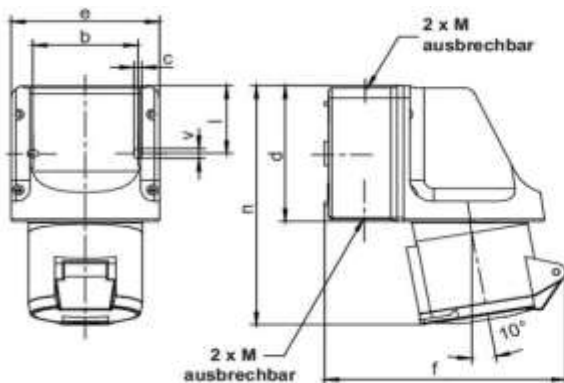

Amp.	16			32		
Pole	3	4	5	3	4	5
b	66,5	66,5	66,5	66,5	66,5	66,5
c	5	5	5	5	5	5
d	96	96	96	96	96	96
e	95	95	95	95	95	95
f	140	143	146	154	154	157
l	47,5	47,5	47,5	47,5	47,5	47,5
n	160	164	164	173	173	173
v	7	7	7	7	7	7
M	20/25	20/25	20/25	20/25	20/25	20/25

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.