

## PRODUCT DATA SHEET

Part Number	131306
EAN	4015609010721
Manufacturer	Walther-Werke
WEEE-Reg-Nr	DE 22131895




### 32A 3P 230V 6H IP44 IEC Wall mount Receptacle

- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Two knock-out cable entries both on top and bottom and one Knock-out floor entry
- Zinc electroplated Steel Screws
- Screwed terminal connection system
- Color Coded
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.

### Ordering/Logistics Information

Order Unit	Piece
Net Weight	0.98 lbs or 0.445 kg
Packing Quantity (VPE)	5
Packaging Length	12.21 in or 0.31 m
Packaging Width	10.04 in or 0.255 m
Packaging Depth	5.91 in or 0.15 m
Gross Weight (VPE)	5.35 lbs or 2.427 kg

### Certification


VDE/ENEC certification	123021
UL certification	E83342 
EAC certification	BY112.02.01.020 060089
And multiple international certifications	

## Classification system

Classification system	ETIM_6.0
ETIM Class	EC001321

## Technical Product Data

Model	Surface mounted (plaster)
IEC Amperage	32A
Amperage acc. UL/CSA	30A
Number of poles and wires	3= 2P + G
Voltage acc. EN 60309-2	230 V / (50-60HZ) red
Clock hour position	6 h
Identification color	Blue
RAL-number	5002
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Maximum torque terminal screw	0.8 NM
Material	Plastic
Type of fastening	Inner lying mounting
Insulated mounting	True

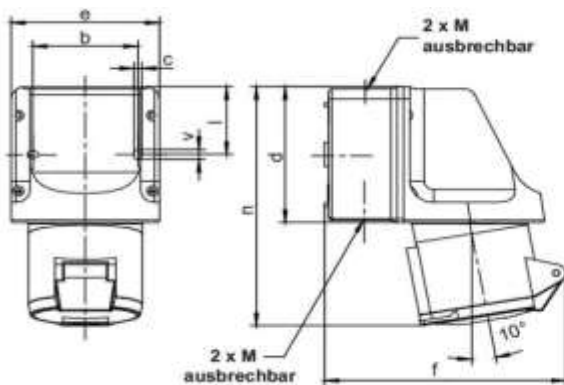

Amp.	16			32		
Pole	3	4	5	3	4	5
b	66,5	66,5	66,5	66,5	66,5	66,5
c	5	5	5	5	5	5
d	96	96	96	96	96	96
e	95	95	95	95	95	95
f	140	143	146	154	154	157
l	47,5	47,5	47,5	47,5	47,5	47,5
n	160	164	164	173	173	173
v	7	7	7	7	7	7
M	20/25	20/25	20/25	20/25	20/25	20/25

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.