

PRODUCT DATA SHEET

Part Number 410419

EAN

Manufacturer Walther-Werke

WEEE-Reg-Nr

20-A IEC 60309 Receptacle, 3-PH, 4 WIRE


- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Retaining Device
- Gasket
- Zinc electroplated Steel Screws
- Screwed terminal connection system
- Color Coded
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.



Ordering/Logistics Information

Order Unit	Piece
Net Weight	0.35 lbs or 0.156 kg
Packing Quantity (VPE)	10
Packaging Length	12.21 in or 0.31 m
Packaging Width	6.6 in or 0.168 m
Packaging Depth	5 in or 0.127 m
Gross Weight (VPE)	3.75 lbs or 1.7 kg

Certification

VDE/ENEC certification	123021
UL certification	E83342 
EAC certification	BY112.02.01.020 060089


And multiple international certifications

Classification system

Classification system	ETIM_6.0
ETIM Class	EC001317

Technical Product Data

Amperage acc. UL/CSA	20A
Number of poles and wires	3P + G
Voltage acc. EN 60309-2	480 V / (50-60HZ) red
Clock hour position	7 h
Identification color	Red
RAL-number	3000
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Maximum torque terminal screw	0.8 NM
Angle of receptacle	Straight
Material	Plastic
Flange size vertical	2.95 in or 75 mm
Drill hole distance vertical	2.36 in or 60 mm
Flange size horizontal	2.95 in or 75 mm
Drill hole distance horizontal	2.36 in or 60 mm

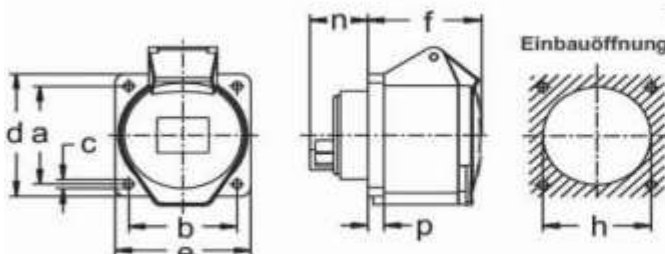

Amp.	16			32		
Pole	3	4	5	3	4	5
a	60	60	60	60	60	60
b	60	60	60	60	60	60
c	5,5	5,5	5,5	5,5	5,5	5,5
d	75	75	75	75	75	75
e	75	75	75	75	75	75
f	52	53	53	65	65	65
h	46	60	60	60	60	60
n	28	28	28	27	27	27
p	6	9	9	9	9	9

Passender Blindflansch, Art.-Nr. 10 015:	
a	60
b	60
c	5,2
d	75
e	75
p	6

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.