

PRODUCT DATA SHEET

Part Number 212409

EAN

Manufacturer Walther-Werke

WEEE-Reg-Nr:

20 A IEC 60309 PLUG, 3-PH, 4 Wire

- High impact thermoplastic housing featuring high resistance And toughness creating an abrasion-resistant material
- Cable gland with “onion ring” neoprene bushing
- Retaining device
- Internal strain relief with “swing-away” feature
- Locking ring and gasket
- Zinc electroplated steel screws
- Shrouded pins
- Color coded by voltage
- Double terminal screws on all amperage devices
- Ground first to mate – last to break for added safety
- Walther can produce and supply the mating cable assemblies.



Ordering/Logistics Information

Order Unit	Piece
Customs Number	
Net Weight	0.35 lbs or 0.156 kg
Packing Quantity (VPE)	10
Packaging Length	12.21 in or 0.31 m
Packaging Width	6.6 in or 0.168 m
Packaging Depth	5 in or 0.127 m
Gross Weight (VPE)	3.75 lbs or 1.7 kg

Certification

UL certification


E329476



And multiple international certification

Technical Product Data

Amperage according to UL/CSA (for UL-version)	20 A
Number of poles and wires	4 = 3P+G
Voltage according to EN 60309-2	230 V (50+60Hz) red
Clock hour position	9 h
Identification color	Blue
Maximum Cable diameter	0.82 in or 20.82 mm
Cable strip length	1.18 in +/- 0.1 in or 30 mm +/- 2.5 mm
Maximum torque terminal screw	0.8 Nm
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Contact material	Nickel-plated brass
Cable entry	Swivel
Angle of plug	Straight
Material	Plastic
Inflammability class of insulation material according to with UL94	V2

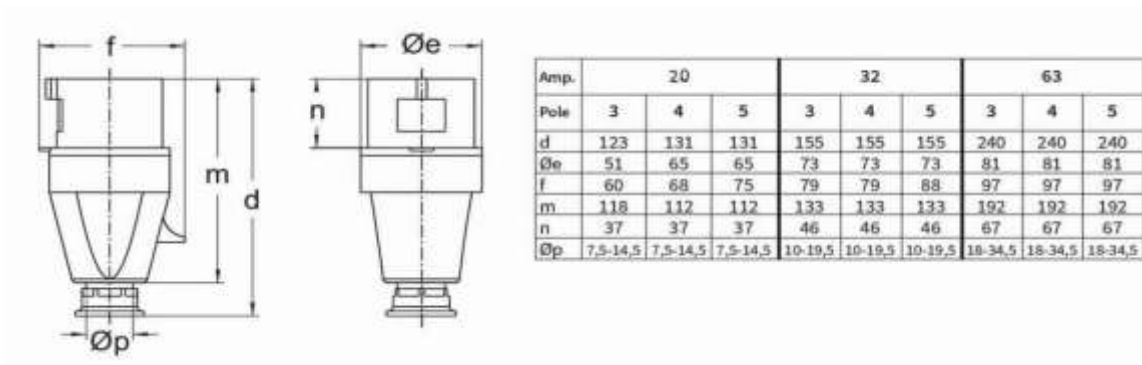

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.