

PRODUCT DATA SHEET

Part Number 239409

EAN 4015609014378

Manufacturer Walther-Werke

WEEE-Reg-Nr: DE 22131895

32A Plug 4P 230V 9hr IP67

- High impact thermoplastic housing featuring high resistance and toughness creating an abrasion-resistant material
- Retaining Device
- Internal Strain Relief with “swing-away” feature
- Locking Ring and Gasket
- Zinc Electroplated Steel Screws
- Shrouded Pins
- Color Coded by Voltage
- Walther can produce and supply the mating cable assemblies



Ordering/Logistics Information

Order Unit	Piece
Customs Number	85366990
Net Weight	0.66 lbs or 0.3 kg
Packing Quantity (VPE)	10
Packaging Length	12.21 in or 0.31 m
Packaging Width	10.04 in or 0.255 m
Packaging Depth	5.91 in or 0.15 m
Gross Weight (VPE)	7.05 lbs or 3.196 kg

Conformities


CE Conformity	Y
RoHS directive	2011/65/EU
RoHS directive	2015/863/EU
REACH regulation	1907/2006

Certification

VDE/ENEC certification	40021520
UL certification	E329476
EAC certification	BY112.02.01.020 06090

Technical Product Data

IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles and wires	4 = 3P+G
Voltage according to EN 60309-2	230 V (50+60Hz)
Clock hour position	9 h
Identification color	Blue
Conductor Cross Section	2.5 – 6 mm ²
Cable Diameter	0.39 in – 0.89 in or 10 mm - 22.5 mm
Cable Strip Length	1.77 in +/- 0.10 in or 45 mm +/- 2.5 mm
Cable Ferrules Length	0.39 in +/- 0.04 in or 10 mm +/- 1mm
Maximum torque terminal screw	0.8 Nm
Maximum torque cable gland	4 Nm
Degree of protection (IP)	IP67
Connection system	Screwed Terminal
Contact material	Nickel-Plated Brass
Cable entry	Swivel
Angle of plug	Straight
Material	Plastic
Inflammability class of insulation material according to UL94	V2

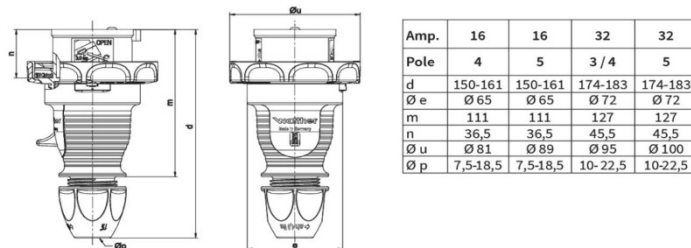

All specifications are subject to change without notice. Consult a Walthers Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.