

## PRODUCT DATA SHEET

Part Number	410409
EAN	4015609018536
Manufacturer	Walther-Werke
WEEE-Reg-Nr	DE 22131895

### 16A IEC 4P 230V 9H IP44 Receptacle


- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Retaining Device
- Gasket
- Zinc electroplated Steel Screws
- Screwed terminal connection system
- Color Coded
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.



### Ordering/Logistics Information

Order Unit	Piece
Net Weight	0.35 lbs or 0.156 kg
Packing Quantity (VPE)	10
Packaging Length	12.21 in or 0.31 m
Packaging Width	6.6 in or 0.168 m
Packaging Depth	5 in or 0.127 m
Gross Weight (VPE)	3.75 lbs or 1.7 kg

### Certification


VDE/ENEC certification	123017
UL certification	E83342 
EAC certification	BY112.02.01.020 060089
And multiple international certifications	

## Classification system

Classification system	ETIM_6.0
ETIM Class	EC001317

## Technical Product Data

IEC-amperage	16 A
Amperage acc. UL/CSA	20 A
Number of poles and wires	4 = 3P + G
Voltage acc. EN 60309-2	230 V / (50-60HZ) red
Clock hour position	9 h
Identification color	Blue
RAL-number	5002
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Maximum torque terminal screw	0.8 NM
Angle of receptacle	Straight
Material	Plastic
Flange size vertical	2.95 in or 75 mm
Drill hole distance vertical	2.36 in or 60 mm
Flange size horizontal	2.95 in or 75 mm
Drill hole distance horizontal	2.36 in or 60 mm

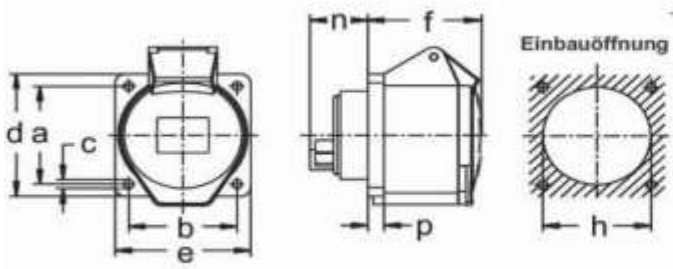

Amp.	16			32			Passender Blindflansch, Art.-Nr. 10 015:	
Pole	3	4	5	3	4	5		
a	60	60	60	60	60	60	a	60
b	60	60	60	60	60	60	b	60
c	5,5	5,5	5,5	5,5	5,5	5,5	c	5,2
d	75	75	75	75	75	75	d	75
e	75	75	75	75	75	75	e	75
f	52	53	53	65	65	65	p	6
h	46	60	60	60	60	60		
n	28	28	28	27	27	27		
p	6	9	9	9	9	9		

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.