

PRODUCT DATA SHEET

Part Number 469519

EAN

Manufacturer Walther-Werke

WEEE-Reg-Nr

60A 5P 480V 7H IP67 Receptacle


- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Retaining Device
- Gasket
- Zinc electroplated Steel Screws
- Screwed terminal connection system
- Color Coded
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.



Ordering/Logistics Information

| | |
|------------------------|---------------------|
| Order Unit | Piece |
| Net Weight | 1.76 lbs or 0.80 kg |
| Packing Quantity (VPE) | 5 |
| Packaging Length | 12.21 in or 0.31 m |
| Packaging Width | 10.04 in or 0.255 m |
| Packaging Depth | 5.90 in or 0.15 m |
| Gross Weight (VPE) | 9.26 lbs or 4.20 kg |

Certification


| | |
|---|--|
| VDE/ENEC certification | 40000707 |
| UL certification | NO. E83342  |
| EAC certification | BY112.02.01.020 06089 |
| And multiple international certifications | |

Classification system

| | |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class | EC001317 |

Technical Product Data

| | |
|--------------------------------|---------------------------|
| IEC-amperage | 63A |
| Amperage acc. UL/CSA | 60A |
| Number of poles and wires | 3P + N + G |
| Voltage acc. EN 60309-2 | 277-480 V / (50-60HZ) red |
| Clock hour position | 7 h |
| Identification color | Red |
| RAL-number | 3000 |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of receptacle | Straight |
| Material | Plastic |
| Flange size vertical | 4.21 in or 107 mm |
| Drill hole distance vertical | 3.35 in or 85 mm |
| Flange size horizontal | 3.94 in or 100 mm |
| Drill hole distance horizontal | 3.03 in or 77 mm |

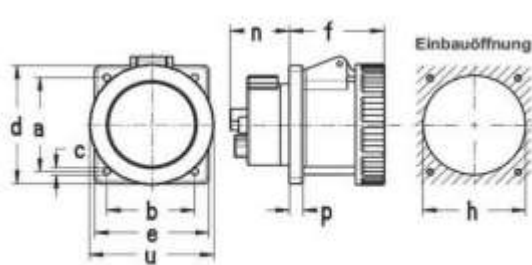

| Amp. | 16 | | | 32 | | | 63 | | |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Pole | 3 | 4 | 5 | 3 | 4 | 5 | 3 | 4 | 5 |
| a | 47 | 60 | 60 | 60 | 60 | 60 | 85 | 85 | 85 |
| b | 47 | 60 | 60 | 60 | 60 | 60 | 77 | 77 | 77 |
| c | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 6,5 | 6,5 | 6,5 |
| d | 62 | 75 | 75 | 75 | 75 | 75 | 107 | 107 | 107 |
| e | 62 | 75 | 75 | 75 | 75 | 75 | 100 | 100 | 100 |
| f | 52 | 52 | 52 | 65 | 65 | 65 | 83 | 83 | 83 |
| h | 46 | 60 | 60 | 60 | 60 | 60 | 90 | 90 | 90 |
| n | 28 | 28 | 28 | 27 | 27 | 27 | 52 | 52 | 52 |
| p | 6 | 9 | 9 | 9 | 9 | 9 | 12 | 12 | 12 |
| u | 72 | 81 | 88 | 96 | 96 | 103 | 110 | 110 | 110 |

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.