

PRODUCT DATA SHEET

Part Number 519316

EAN

Manufacturer Walther-Werke

WEEE-Reg-Nr DE 22131895

20A 125V 3P 4H IP67 IEC 15° Angled receptacle


- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Gasket
- Zinc electroplated Steel Screws
- Color Coded by voltage
- Double terminal screws on all amperage devices
- Ground first to mate – last to break for added safety
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can produce and supply the mating cable assemblies.



Ordering/Logistics Information

Order Unit	Piece
Net Weight	0.31 lbs or 0.141 kg
Packing Quantity (VPE)	10
Packaging Length	12.21 in or 0.31 m
Packaging Width	6.42 in or 0.163 m
Packaging Depth	4.45 in or 0.113 m
Gross Weight (VPE)	3.36 lbs or 1.522 kg

Certification


VDE/ENEC certification	123017
UL certification	E83342 
EAC certification	BY112.02.01.020 06089
And multiple international certifications	

Classification system

Classification system	ETIM_6.0
ETIM Class	EC001317

Technical Product Data

IEC-amperage	16A
Amperage acc. UL/CSA	20A
Number of poles	3= 1P + N + G
Voltage acc. EN 60309-2	125 V / (50-60HZ)
Clock hour position	4 h
Identification color	Yellow
RAL-number	1018
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Maximum torque terminal screw	0.8 Nm
Angle of receptacle	Angled
Material	Plastic
Flange size vertical	2.68 in or 68 mm
Drill hole distance vertical	1.85 in or 47 mm
Flange size horizontal	2.44 in or 62 mm
Drill hole distance horizontal	1.85 in or 47 mm

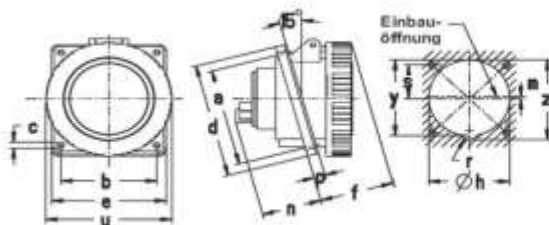

Amp.	16			32			63		
	3	4	5	3	4	5	3	4	5
a	47	85	85	85	85	85	85	85	85
b	47	77	77	77	77	77	77	77	77
c	5,5	5,5	5,5	5,5	5,5	5,5	6,5	6,5	6,5
d	68	100	100	100	100	100	107	107	107
e	62	92	92	92	92	92	100	100	100
f	49	52	52	56	56	60	82	82	82
h	51	73	70	73	73	78	81	81	84
m	-/-	2	2	-/-	2,5	2,5	-/-	2,5	3
n	41	38	38	47	47	47	64	64	64
p	6	9	9	9	9	9	12	12	12
r	6,5	7,5	7,5	7,5	7,5	8,5	8	8	9
s	-/-	42,5	42,5	-/-	42,5	42,5	-/-	42,5	42,5
u	72	81	88	96	96	103	110	110	110
y	53	76	-/-	76	76	-/-	85	85	-/-
z	57	82	74	82	82	85	90	90	90

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-843