

## PRODUCT DATA SHEET

|              |               |
|--------------|---------------|
| Part Number  | 569409        |
| EAN          | 4015609022687 |
| Manufacturer | Walther-Werke |
| WEEE-Reg-Nr  | DE 22131895   |




### 60A 4P 9H 230V IP67 IEC 15° Angled receptacle

- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Gasket
- Zinc electroplated Steel Screws
- Color Coded by voltage
- Double terminal screws on all amperage devices
- Ground first to mate – last to break for added safety
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.

### Ordering/Logistics Information

|                        |                       |
|------------------------|-----------------------|
| Order Unit             | Piece                 |
| Net Weight             | 1.61 lbs or 0.7277 kg |
| Packing Quantity (VPE) | 10                    |
| Packaging Length       | 12.21 in or 0.31 m    |
| Packaging Width        | 10.04 in or 0.255 m   |
| Packaging Depth        | 5.91 in or 0.15 m     |
| Gross Weight (VPE)     | 8.46 lbs or 3.8345 kg |

### Certification


|   |  |
|---|--|
| VDE/ENEC certification                    | 40000707   |
| UL certification                          | E83342  |
| EAC certification                         | BY112.02.01.020 06089  |
| And multiple international certifications |  |

## Classification system

|                       |          |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class            | EC001317 |

## Technical Product Data

|                                |                   |
|--------------------------------|-------------------|
| IEC-amperage                   | 63A               |
| Amperage acc. UL/CSA           | 60A               |
| Number of poles                | 4= 3P + G         |
| Voltage acc. EN 60309-2        | 230 V / (50-60HZ) |
| Clock hour position            | 9 h               |
| Identification color           | Blue              |
| RAL-number                     | 5002              |
| Degree of protection (IP)      | IP67              |
| Connection system              | Screwed terminal  |
| Maximum torque terminal screw  | 2 Nm              |
| Angle of receptacle            | 15° Angled        |
| Material                       | Plastic           |
| Flange size horizontal         | 4.21 in or 107 mm |
| Drill hole distance vertical   | 3.74 in or 85 mm  |
| Flange size horizontal         | 3.94 in or 100 mm |
| Drill hole distance horizontal | 3.03 in or 77 mm  |

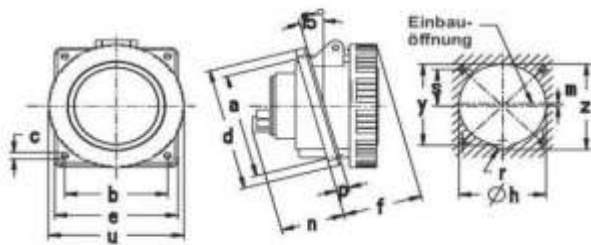

| Amp. | 16  |      |      | 32  |      |      | 63  |      |      |
|------|-----|------|------|-----|------|------|-----|------|------|
|      | 3   | 4    | 5    | 3   | 4    | 5    | 3   | 4    | 5    |
| a    | 47  | 85   | 85   | 85  | 85   | 85   | 85  | 85   | 85   |
| b    | 47  | 77   | 77   | 77  | 77   | 77   | 77  | 77   | 77   |
| c    | 5,5 | 5,5  | 5,5  | 5,5 | 5,5  | 5,5  | 6,5 | 6,5  | 6,5  |
| d    | 68  | 100  | 100  | 100 | 100  | 100  | 107 | 107  | 107  |
| e    | 62  | 92   | 92   | 92  | 92   | 92   | 100 | 100  | 100  |
| f    | 49  | 52   | 52   | 56  | 56   | 60   | 82  | 82   | 82   |
| h    | 51  | 73   | 70   | 73  | 73   | 78   | 81  | 81   | 84   |
| m    | -/- | 2    | 2    | -/- | 2,5  | 2,5  | -/- | 2,5  | 3    |
| n    | 41  | 38   | 38   | 47  | 47   | 47   | 64  | 64   | 64   |
| p    | 6   | 9    | 9    | 9   | 9    | 9    | 12  | 12   | 12   |
| r    | 6,5 | 7,5  | 7,5  | 7,5 | 7,5  | 8,5  | 8   | 8    | 9    |
| s    | -/- | 42,5 | 42,5 | -/- | 42,5 | 42,5 | -/- | 42,5 | 42,5 |
| u    | 72  | 81   | 88   | 96  | 96   | 103  | 110 | 110  | 110  |
| y    | 53  | 76   | -/-  | 76  | 76   | -/-  | 85  | 85   | -/-  |
| z    | 57  | 82   | 74   | 82  | 82   | 85   | 90  | 90   | 90   |

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-843