# PRODUCT DATA SHEET

| Part Number | 469409 |
|---|---|

| | |
|---|---|
| EAN | 4015609020560 |
| Manufacturer | Walther-Werke |
| WEEE-Reg-Nr: | DE 22131895 |

## 60A 4P 250V 9h IP67

- High impact thermoplastic housing featuring high resistance and toughness creating an abrasion-resistant material
- Retaining device
- Locking ring and gasket
- Zinc electroplated steel screws
- Color coded by voltage
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can produce and supply the mating cable assemblies

## Ordering/Logistics Information

| | |
|---|---|
| Order Unit | Piece |
| Customs Number | 85366990 |
| Net Weight | 1.54 lbs or 0.699 kg |
| Packing Quantity (VPE) | 5 |
| Packaging Length | 12.21 in or 0.31 m |
| Packaging Width | 10.04 in or 0.255 m |
| Packaging Depth | 5.91 in or 0.15 m |
| Gross Weight (VPE) | 8.14 lbs or 3.691 kg |

## Conformities

| | |
|---|---|
| CE Conformity | Y |
| RoHS directive | 2011/65/EU |
| RoHS directive | 2015/863/EU |
| REACH regulation | 1907/2006 |

## Certification

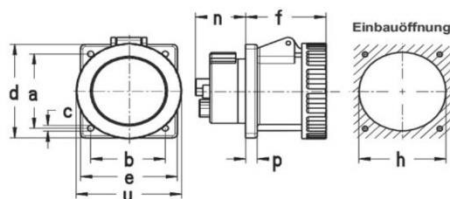| | |
|---|---|
| VDE certification | 40000707 |

| UL certification | E83342 |
|---|---|
| EAC certification | BY112.02.01.020 06089 |

## Technical Product Data

| IEC-amperage | 63 A |
|---|---|
| Amperage according to UL/CSA (for UL-version) | 60 A |
| Number of poles and wires | 4 = 3P + G |
| Voltage according to EN 60309-2 | 230 V (50+60Hz) |
| Clock hour position | 9 h |
| Identification color | Blue |
| Degree of protection (IP) | IP67 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Material | Plastic |
| Inflammability class of insulation material according to with UL94 | V2 |
| Flange size vertical | 3.03 in or 107 mm |
| Drill hole distance vertical | 3.35 in or 85 mm |
| Flange size horizontal | 3.94 or 100 mm |
| Drill hole distance horizontal | 3.03 in or 77 mm |



| Amp. | 16 | | | 32 | | | 63 | | |
|---|---|---|---|---|---|---|---|---|---|
| Pole | 3 | 4 | 5 | 3 | 4 | 5 | 3 | 4 | 5 |
| a | 47 | 60 | 60 | 60 | 60 | 60 | 85 | 85 | 85 |
| b | 47 | 60 | 60 | 60 | 60 | 60 | 77 | 77 | 77 |
| c | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 6,5 | 6,5 | 6,5 |
| d | 62 | 75 | 75 | 75 | 75 | 75 | 107 | 107 | 107 |
| e | 62 | 75 | 75 | 75 | 75 | 75 | 100 | 100 | 100 |
| f | 52 | 52 | 52 | 65 | 65 | 65 | 83 | 83 | 83 |
| h | 46 | 60 | 60 | 60 | 60 | 60 | 90 | 90 | 90 |
| n | 28 | 28 | 28 | 27 | 27 | 27 | 52 | 52 | 52 |
| p | 6 | 9 | 9 | 9 | 9 | 9 | 12 | 12 | 12 |
| u | 72 | 81 | 88 | 96 | 96 | 103 | 110 | 110 | 110 |

*All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.*