

## PRODUCT DATA SHEET

Part Number	635306
EAN	4015609023356
Manufacturer	Walther-Werke
WEEE-Reg-Nr	DE 22131895

### 30A-32A 3P 230V 6H IP44 IEC Inlet


- High Impact Thermoplastic featuring high resistance And toughness creating an abrasion-resistant material
- Retaining Device
- Gasket
- Zinc electroplated Steel Screws
- Double terminal screwed on all amperage devices
- Color Coded by voltage
- Ground first to mate – last to break for added safety
- Finger-safe in accordance with BGV A3 soft transition radius from flange to collar
- Walther can custom design configurations that meet your application requirements.
- Walther can produce and supply the mating cable assemblies.



### Ordering/Logistics Information

Order Unit	Piece
Net Weight	0.34 lbs or 0.1526 kg
Packing Quantity (VPE)	10
Packaging Length	12.21 in or 0.31 m
Packaging Width	6.42 in or 0.163 m
Packaging Depth	4.45 in or 0.113 m
Gross Weight (VPE)	361.97 lbs or 1.638 kg

### Certification


VDE/ENEC certification	126147	
UL certification	E83342	
And multiple international certifications		

## Classification system

Classification system	ETIM_6.0
ETIM Class	EC001319

## Technical Product Data

IEC-amperage	32A
Amperage acc. UL/CSA	30A
Number of poles and wires	2P + G
Voltage acc. EN 60309-2	230 V / (50-60HZ)
Clock hour position	6 h
Identification color	Blue
RAL-number	5002
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Connection type	Built-up device plug
Angle of receptacle	Stright
Material	Plastic

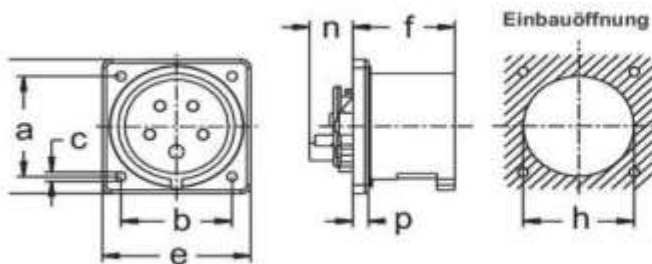

Amp.	16			32		
Pole	3	4	5	3	4	5
a	47	60	60	60	60	60
b	47	60	60	60	60	60
c	5,5	5,5	5,5	5,5	5,5	5,5
d	62	80	80	80	80	80
e	62	80	80	80	80	80
f	47	47	47	56	56	56
h	50	67	67	71	71	71
n	22	22	22	22	22	22
p	8,5	8,5	8,5	8,5	8,5	8,5

All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437.