

DUAL UTILITY PEDESTAL

30A/480V, 20A/120V



FEATURES AND BENEFITS

- Non conductive, UV resistant, plastic enclosures
- Mechanical interlocking switch
- Stainless steel pedestal to protect mechanical interlock and GFCI duplex
- Walther can produce and supply the mating connectors and cable assemblies

SPECIFICATIONS

Rating	30A/480V~3PH 20A/120V~1PH
Environment Rating	NEMA 3R
Input-1	20A/120V, 1P+N+G (Hard wire)
Input-2	30A/480V, 3P+G (Hard wire)
Output-1	(1) 20A/120V GFCI Duplex
Output-2	(1) 30A/480V IEC60309 IP67, 3P+G Receptacle
Circuit-2 Protection	32A, 3-Pole, IP67 Mechanical interlock switch
Mechanical Interlock Switch	32A/480V, 3-Pole, IP67
Approximate Dimensions	L 8" W 9" H 58"
Approximate Weight	29 lbs.


DESCRIPTION

Dual utility receptacles mounted on a stainless-steel pedestal are perfect for refrigeration areas, processing areas, washdown areas, and more. Receptacles can withstand varying temperatures and be custom designed for different IP ratings depending on your business needs.


APPLICATION

Construction sites, Vineyards, Entertainment, Shipbuilding or anywhere you need portable power.

ACCESSORIES

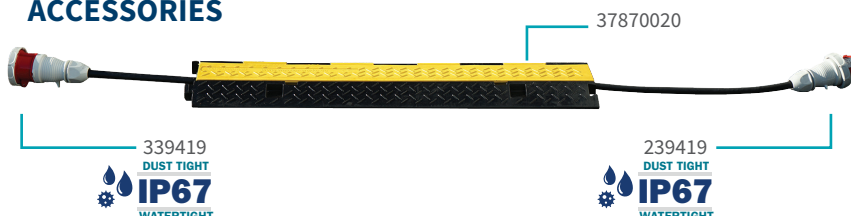

Additional Products

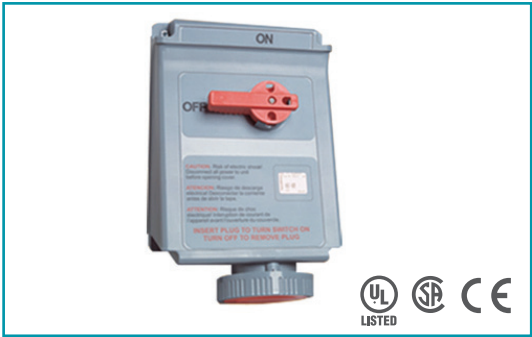


MECHANICAL INTERLOCK DEVICES
Designed to combine a disconnect switch and receptacle into one compact unit



PIN & SLEEVE DEVICES
Manufactured to IEC 60309-1 & 2 standards and are interchangeable anywhere in the world



POWER DISTRIBUTION SYSTEMS
Custom-built distribution systems optimizing power from power source to individual load

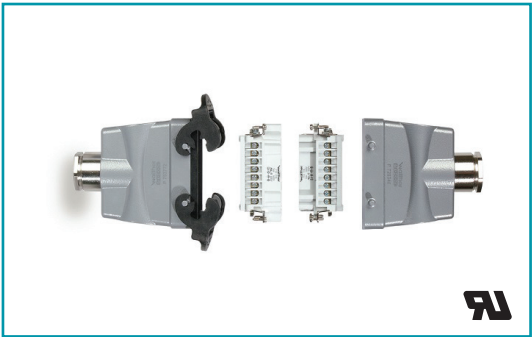

PROCON HEAVY DUTY CONNECTORS
Safe, error-free power connection designed for tight spaces



POWER DISTRIBUTION
Portable or hardwired power distribution units fitted with multiple outputs. Surge protection included.



CABLE ASSEMBLIES
Standard stock in 25ft, 50ft, & 100ft. Custom configurations are available



+1 (800) 925-8437 | +1 (732) 537-9201

custserv@waltherelectric.com | www.waltherelectric.com