

## PDU 40A, 3-PH, 3-Pole, 5 Wire, UL Listed

MPN: **HEB3102U**

### FEATURES & BENEFITS

- Compact Solid Rubber Enclosure, non-conductive, offering good resilience and tensile strength· Outstanding resistance to abrasion and fatigue
- Overcurrent Protection included to prevent excessive amounts of current or a short circuit
- Space-saving design for easy storage stacking
- Walther can design and manufacture mating cable assemblies



### SPECIFICATIONS

<b>Rating</b>	40A, 120/208VAC, 3P+N+G
<b>Environmental Rating</b>	NEMA 3R
<b>Input</b>	(5) E16 Camlocks, 3P+N+G
<b>Output</b>	(6) 20A Duplex GFCI
<b>Overcurrent Protection</b>	(6) 20A 1-Pole, MCB
<b>Dimensions</b>	L 11.5" W 12.5" H 14"
<b>Weight</b>	19 lbs.

### DESCRIPTION


40A, 120/208V, Three Phase one tier PDU with **Input:** (5) E16 Camlocks, 3-Pole, 5 Wire, **Output:** (6) 20A Duplex GFCI receptacles with weather cover protected by (6) 20A 1-Pole circuit breakers

### APPLICATION


Construction Sites, Entertainment, ship building/Repair etc.

*NOTE: All specifications are subject to change without notice. Consult a Walther Electric Engineer for the latest specifications or speak with a member of our Customer Care Team +1 (800) 925-8437*

**HEB3102U Technical Drawing**

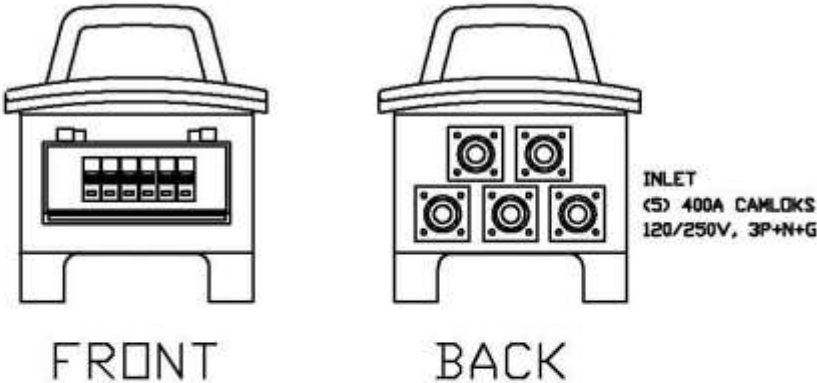

(6) 20A DUPLEX GFCI

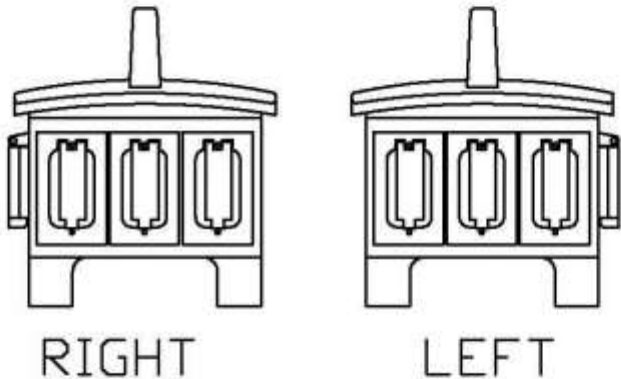

INLET  
 (5) CAMLOCKS

